

Potential Evaluation and Optimization of Natural Biopolymers in Water-Based Drilling Mud

Akeem Olatunde Arinkoola*¹, Salawudeen Taofeeq Olalekan²,
Kazeem Kolapo Salam², Jimoh Monsurat Omolola²
and Azeez Olatunji Gafar²

1. Department of Chemical Engineering Ladake Akintola University of Technology, Ogbomso, Nigeria.

2. Science Laboratory Technology, The Oke-Ogun Polytechnics, Saki, Nigeria.

(Received 16 May 2017, Accepted 20 April 2018)

[DOI: 10.22059/jchpe.2018.233480.1197]

Abstract

Drilling cost optimization has always been an important issue in the petroleum industry. In order to save costs and create new markets for local materials, *Detarium microcarpum* also known as ofor and food gum (*Cissus populnea*) powders were evaluated in this study at high temperature as an alternative to imported chemical additives in water-based drilling fluid. The base mud composed of alkali beneficiated local clay, *Brachystegia eurycoma* also known as achi, corn and coconut fibers whose viscosity, yield point and gel strength fell short the recommended API standard from preliminary analysis. The two factors were combined using experimental design technique and mud properties optimized numerically using desirability function. At optimum conditions, The mud's properties are as following: Plastic viscosity, PV (18.4 ± 0.63 cp), Yield point, Yp (15.7 ± 0.9 lbf/100ft²), Fluid loss (FL) (12.1 ± 0.37 ml) and 10 min Gel strength (5.6 ± 0.05 lbf/100ft²). These values are in good agreement with the API recommended standard. Both biopolymers exhibited high potential at low and moderate temperatures. However, food gum is thermally stable, a good rheology stabilizer and filtrate reducer up to the test temperature of 185 °F. The presence and nature of salts in solution influences differently the viscosity of the two biopolymers.

Keywords

API filtrate loss;
Biopolymer;
Experimental design;
Gel strength;
Optimization;
Rheology.

1. Introduction

Filtration control is primarily the main reason for using polymers as supplement additives to bentonite in drilling muds. Notwith-

standing, polymers are also added as viscosity booster or shale stabilizer. Because water-based mud (WBM) is the most common drilling fluid for both offshore and onshore, water-soluble polymers (WSPs) are preferred in drilling fluids. The WSPs are classified into two types; synthetic and natural polymers. Examples of synthetic polymers are hydrolyzed polyacrylate and vinyl

* Corresponding Author.

Tel./Fax: +(234) 8052263477

Email: moranroolaakeem@yahoo.com (A. O. Arinkoola)

acetate-maleic anhydride co-polymers. There are two main drawbacks in using synthetic polymers; (a) reaction with calcium and (b) severe viscosity and gelation of the mud [1]. Besides these, synthetic polymers are expensive and generally salt- and pH-sensitive as oppose to natural polymers. The importation of these chemicals apart from adding to OPEX may not allow indigenous companies in the oil and gas business to compete effectively with their foreign counterparts.

Natural polymers are able to absorb water and increase the viscosity of water (i.e., thickening water) due to their molecular size and shape. They rely on chain extension and physical entanglement of solvated chains for viscosity enhancement. They are non-charged and therefore less sensitive to salinity in contrast to the synthetic ones [2]. Long and complicated molecular chains of water-based polymers tie up the water and can build viscosity without solidified [3]. Examples of natural polymers include starch, carboxymethyl cellulose (CMC) and Hydroxyethyl cellulose (HEC). Some hemicelluloses have also been utilized for a long time due to their nontoxicity, solubility in water and ability to form gels. Typical examples are the mannans such as guar gum, locust bean gum, and konjac glucomannan, which are commercial emulsifiers and thickening agents [4]. Examples of gums include exudate (Arabic, Karaya), microbial fermentation (pullulan, xanthan gum, dextran and gellan gum) and seed gums (guar gum) [5].

Polysaccharides are water-soluble and have found applications in many oilfield operations including drilling, polymer-augmented water flooding, chemical flooding and profile modification. Different natural polymers such as starch, soy protein isolate, Guar gum, Xanthan gum, and cellulose derivative have been applied to improve the rheological and filtration performances of WBMs [6-10]. Starch properties in drilling mud depend on the source, granule size distribution and morphology, amylose/amylopectin ratio and other factors such as composition, pH, and nature of chemical modifications [11]. The stability and texture of starch-based products depend on gelatinization and reorganization behaviors [12]. According to Omotomiowa et al., [13], locally sourced cassava starch at 4% concentration was enough to improve rheology of WBM significantly. Gray and Darly, [14], studied the use of guar gum, carboxymethyl cellulose (CMC), and hy-

droxypropyl starch as filtration control agents and as viscosifiers. They concluded that filtration parameters like sorptivity and diffusivity of these polymers are dependent on temperature.

Scleroglucan, also known as schizophyllan was reported to exhibited high viscosity at low concentrations [15]. Compared with other biopolymers, Scleroglucan was reported to be more stable thermally, more tolerance to divalent and trivalent cations such as Ca^{2+} , Mg^{2+} and Fe^{3+} and characterized by excellent carrying capacity. However, it is highly sensitive to chemically reactive additives and geological formations at high temperature [15].

Many indigenous polymers have become very popular for their use in drilling fluid due to their ability to modify rheological properties of clay suspension and their environmental friendliness [16]. The common challenges experienced are excessive fluid loss, low gel strength and the need to formulate a fluid with desirable rheological properties to withstand increasing temperature and pressure conditions [17]. An example of such a polymer is Welan gum (WLG). WLG is widely as a thickener in the food industry. Its molecule consists of repeating tetrasaccharide units with single branches of L-mannose or L-rhamnose [18]. WLG exhibits good viscosity in at elevated temperature and in the presence of sodium chloride [19]. However, the use of WLG gum in drilling mud formulations was greeted by excessive fluid loss in drilling mud [20].

Considering the economics, sustainability, and environmental effect, the use of natural polymers is highly recommended. Some efforts using wholly or partially substituted local materials have been reported in the design of muds for drilling [17, 21, 22]. The limitations that highlighted some of the findings could be summarized thus: (1) excessive fluid loss, (2) low gel strength and (3) thermal instability and (4) sensitivity to sodium, potassium and calcium salts. In this study, two lesser-known natural polymers (*Cissus populnea* and *Detarium micocarpum*) were examined experimentally on the basis of rheology, filtration control, thermal stability and sensitivity to Na^+ and Ca^{+2} salts [23].

2. Experimental

2.1 Material

The polymers (*Cissus populnea* and *Detarium micocarpum*) were locally sourced from markets in Lagos, South-west Nigeria. Analar grade NaHCO_3 , NaCl and CaCl_2 were purchased from local suppliers. The bentonite clay was sourced locally from Ohia (007° 25" N/007° 47" E) in Abia state, Nigeria. The description of the polymers is given as follows:

2.1.1 *Cissus populnea*

C. populnea plant also called food gum plant can be found in western part of Africa. The *Cissus* gum extracted from the plant had been reported to be used as a soup thickener, treatment of venereal diseases, indigestion [24, 25] and drug binder [26]. The phytochemical constituents of the extracted liquor have been reported and used in ethnomedicine for treatment of male infertility [27]. As shown in Table 1, food gum plant contains more than 60 % cellulose and about 15% Hemicelluloses by weight.

Table 1. Proximate composition of *C. populnea* fibers

Composition	Percentage (w/w %)
Moisture	3.94 ± 0.23
Dry matter	96.06 ± 0.2
Ash	1.59 ± 0.14
Wax	2.94 ± 0.31
Water soluble	2.33 ± 0.27
Pectins	1.14 ± 0.03
Lignins	11.52 ± 0.27
Hemicelluloses	14.74 ± 0.42
Celluloses	61.80 ± 0.45

2.1.2 *Detarium micocarpum*

D. micocarpum is a biopolymer confined to West and Central Africa. It is typically a species of dry savanna [28]. It is popular among the Ibo tribe of South-eastern Nigeria. *D. micocarpum* bears different local names among socio-cultural groups of different countries. For examples, socio-cultural groups like Yoruba, Igbo, Kanuri and Hausa in Nigeria named the plant as Ogbogbo, Ofo, Gatapo and Taure while Fulbe, Sonrai, and Soninke in Mali called it Doli, Tambacounba, and Fantu respectively [29]. It is the most investigated species of the genus because of its importance in African

traditional medicine. The legume is very rich in polysaccharide gum. Table 2 shows the proximate composition of *D. micocarpum* fruit. The seed polysaccharide was described as a stabilizer and gelling agent in some processed fruit products [30].

2.2 Clay processing and analysis

The microscopic structure of the raw clay was analyzed using X-ray diffraction (XRD). The diffraction of X-rays represented in Fig. 1 showed that the clay is predominantly composed of kaolinite, illite, and quartz. Kaolinite, $\text{Al}_2\text{Si}_2\text{O}_5(\text{OH})_4$, is a layered aluminosilicate with a dioctahedral 1:1 layer structure consisting of tetrahedral silicate sheets and octahedral aluminum hydroxide sheets [32]. The chemical composition of the samples was determined after beneficiation using sodium bicarbonate (NaHCO_3) with X-ray fluorescence spectroscopy (XRF) using a Philips X-Unique spectrometer. The description of the beneficiation is available elsewhere [33]. The physicochemical properties of the raw and the modified samples are shown in Tables 3. The major oxides are oxides of silica and alumina. Comparing the result with the result reported by Bailey [32], the silica content (68.9%) is comparable to that of Wyoming bentonite (68.0%). However, the Fe_2O_3 and TiO_2 (8.5 and 7.67%) contents were higher than the reported Wyoming bentonite (3.94 and 0.16%, respectively).


2.3 Rheology and filtration

All rheological data were collected in triplicates using OFITE 8-speed viscometer. The viscometer measures the torque under 8 different rotational speeds, ranging from 600 to 3 rpm. The readings were translated into mud plastic viscosity, mud yield point, and mud apparent viscosity using Eq. 1 - 3. Mud filtrate was measured with OFITE Model 14030 filter press. Mud passes through a filter paper at 100 psi, and the filtrate volume after 10 second and 10 minutes of filtration were recorded. The pressure was provided by a cartridge containing pressurized carbon dioxide. Mud was prepared with high-speed mixer. The mud viscometer, filter press, and mud mixer are all industry-standard devices.

Table 2. Proximate composition of *D. micocarpum* [31]

Composition	Mesocarp (%)	Seed (%)
Moisture	15.0 ± 0.01	5.0 ± 0.01
Crude fat	10.5 ± 0.01	15.5 ± 0.02
Crude Ash	3.3 ± 0.01	3.5 ± 0.02
Crude fiber	10.2 ± 0.02	11.2 ± 0.01
Crude protein	6.0 ± 0.03	13.5 ± 0.02
Total Carbonhydrate	54.0 ± 0.01	50.5 ± 0.03

* Results are mean ± SD of duplicate determinations

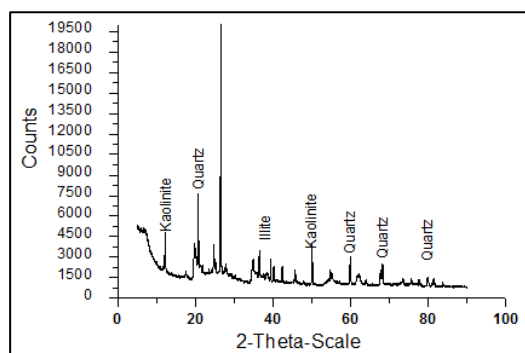**Figure 1.** Diffraction of X-rays: microscopic structure of the raw clay.**Table 3.** XRF Result for the analysis of chemical composition of the raw samples of Nigeria Bentonite

Oxides	Element	Ohia Clay	
		Raw	Treated
SiO ₂	Si	68.9	67.5
Al ₂ O ₃	Al	11	10
Fe ₂ O ₃	Fe	8.5	8.48
MnO	Mn	ND	ND
MgO	Mg	ND	ND
CaO	Ca	ND	ND
Na ₂ O	Na	0.08	3.12
K ₂ O	K	1.4	ND
TiO ₂	Ti	7.67	7.87
P ₂ O ₅	P	ND	ND
LOI	LOI	2.15	3

The Plastic viscosity (PV) was calculated by the following formula:

$$PV = \theta_{600} - \theta_{300} \text{ (in cp)} \quad (1)$$

The Apparent Viscosity (AV) was calculated by

$$AV = \frac{\theta_{600}}{2} \text{ (In cp)} \quad (2)$$

The yield point (Yp) was estimated by

$$Yp = \theta_{300} - PV \left(\text{in } \frac{\text{lb}}{100\text{ft}^2} \right) \quad (3)$$

θ_{600} is the dial reading at 600 rpm and θ_{300} is the reading at 300 rpm.

2.3 Influence of salts on rheology of biopolymers

A two-level factorial design of experiment was used to investigate the sensitivity of *C. populnea* and *D. micocarpum* to NaCl and CaCl₂ in the presence of other additives. A base mud of fixed volume was prepared by mixing 24 g of beneficiated Ohia clay into 350 ml of fresh water. Coconut fiber, Corn starch, *C. populnea* and *D. micocarpum* were added in a 16 runs experiment as shown in Table 4. The *C. populnea* and *D. micocarpum* were evaluated at 185 °F for their sensitivity to NaCl and CaCl₂ in WBM formulation. The effects on the plastic viscosity (PV) and yield point (YP) were examined using additives in the following ranges: Coconut fiber (1 – 2.5 g), Corn starch (2 – 5 g), Salts (9 – 11g), *C. populnea* (2 – 5 g) and *D. micocarpum* (2 – 5 g).

2.4 Application of selected bio-polymers in WBM

2.4.1 Mud composition

The composition of the base mud used for evaluation is available elsewhere (Salawudeen et al., 2016). It was noticed that the analysis from these authors was performed using fresh water and the fluid loss (12 ml/30 Mins/100 psi), plastic viscosity (5 cp), yield point (2 lbf/100ft²), 10 Sec/10 mins gel strength (1/1 gel), pH (7.35), mud weight (8.6 lbm/gal) and cake thickness (0.2 inch) were recorded. It is clear that these properties, except fluid loss, were below the recommended range (8-35 cp plastic viscosity, 5 ≤ Yp ≤ 3PV, 2-5 lb/100ft² 10 sec. gel, 2-35 lb/100ft² 10 min. gel and 9.5-11.5 pH) according to the API [34]. *D. micocarpum* and *C. populnea* were applied to improve on these properties using an experimental design.

2.4.2 Experimental Matrix

The 13 experimental runs for two (2) factors using the central composite sampling design (CCD) are shown in Table 5 and 6 for 85 and 185 °F, respectively. The choice of CCD is the need for reli-

able objective functions for the optimization study. To the base mud, *D. micocarpum* and *C. populnea* were added according to experimental design and different mud systems were prepared using API standard equipment. The rheological parameters were determined at 85 and 185 °F for

each run. The physicochemical properties (pH and mud weight) were carried out according to the API chemical tests. API filtrate and gel (3 rpm dial reading after 10 seconds and 10 min of mixing) were determined using API recommendations.

Table 4. Factorial design matrix for biopolymer sensitivity to salinity at 185 °F

Run	CNF (g)	C. pop (g)	D. mico (g)	CasS (g)	Salt (g)	NaCl Salt			CaCl ₂ Salt		
						PV(cp)	Yp (lbf/100ft ²)	AV (cp)	PV (cp)	Yp (lbf/100ft ²)	AV (cp)
B. Mud	1	2	5	5	11	3	1	.5	7	12	13
B. Mud	1	2	5	2	9	4	0	4	4	14	11
B. Mud	1	2	2	5	9	6	0	6	5	2	6
B. Mud	1	2	2	2	11	4	0	4	6	0	6
B. Mud	2.5	2	2	2	9	3	1	3.5	7	1	7.5
B. Mud	2.5	2	5	5	9	4	2	5	6	2	7
B. Mud	2.5	5	2	2	11	15	13	21.5	9	3	10.5
B. Mud	2.5	5	5	2	9	11	5	13.5	10	1	9.5
B. Mud	1	5	2	5	11	11	4	13	23	23	34.5
B. Mud	1	5	5	5	9	25	26	38	15	9	19.5
B. Mud	2.5	5	2	5	9	20	18	29	26	26	39
B. Mud	2.5	2	5	2	11	4	4	6	6	2	7
B. Mud	2.5	2	2	5	11	5	0	5	3	11	8.5
B. Mud	2.5	5	5	5	11	21	24	33	21	21	31.5
B. Mud	1	5	5	2	11	13	7	16.5	16	10	21
B. Mud	1	5	2	2	9	15	12	21	12	5	14.5

* B. Mud = Base mud, CNF=Cocoonut fiber, CasS= Cassava starch

Table 5. Rheological, filtration and physicochemical properties of drilling fluids at 85 °F

Run	A: C.pop, g	B: D. mic, g	PV, cp	Yp, (lb/100 ft ²)	Fluid loss, ml	10 Sec Gel (lb/ 100ft ²)	10 mins Gel (lb/ 100ft ²)	Cake thickness (mm)	MW (lbm/gal)
Base Mud	1	1	14	7	8.8	2	4	0.5	9.1
Base Mud	0	1	14	23	8	3	5	0.4	8.9
Base Mud	0	0	14	2	12.4	2	3	0.7	8.7
Base Mud	0	0	14	2	12.4	2	3	0.7	8.6
Base Mud	0	-1	10	1	15	1	2	0.6	8.7
Base Mud	-1	0	4	24	8	2	3	0.5	8.8
Base Mud	-1	-1	6	3	12	1	2	0.5	8.6
Base Mud	1	0	11	7	9.4	2	3	0.6	8.7
Base Mud	-1	1	19	26	8	3	6	0.7	8.7
Base Mud	0	0	14	2	12.4	2	3	0.7	8.6
Base Mud	1	-1	5	10	13	2	2	0.7	8.6
Base Mud	0	0	14	2	12.4	2	3	0.7	8.6
Base Mud	0	0	14	2	12.4	2	3	0.7	8.6

*High level (1), Medium level (0), Low level (-1)

*Base mud composition: 24 g Clay+350 ml water+1.25 g Corn fiber+0.25 g Cocoonut fiber+2 g B. eurycoma

Table 6. Rheological, filtration and physicochemical properties of drilling fluids at 185 °F

Run	A: C. pop, g	B: D. mic, g	PV, cp	Yp, (lb/100 ft ²)	Fluid loss, ml	10 Sec Gel (lb/100 ft ²)	10 mins Gel (lb/100 ft ²)	Cake thickness (mm)	MW (lbm/gal)
Base Mud	1	1	21	25	12	2	5	1.5	9.1
Base Mud	0	1	24	17	12.6	3	4	1	8.9
Base Mud	0	0	7	2	12	1	2	1.4	8.7
Base Mud	0	0	7	2	12	1	2	1.4	8.6
Base Mud	0	-1	4	3	10.4	2	2	1.2	8.7
Base Mud	-1	0	10	6	8.2	2	3	1.1	8.8
Base Mud	-1	-1	6	1	9	1	2	1	8.6
Base Mud	1	0	22	1	10.6	3	4	0.8	8.7
Base Mud	-1	1	19	16	12.2	4	6	1	8.7
Base Mud	0	0	7	2	12	1	3	1.3	8.6
Base Mud	1	-1	8	3	13.6	3	4	1.4	8.6
Base Mud	0	0	7	2	12	1	2	1.5	8.6
Base Mud	0	0	7	2	12	1	2	1.4	8.6

*High level (1), Medium level (0), Low level (-1)

*Base mud composition: 24 g Clay+350 ml water+1.25 g Corn fiber+0.25 g Coconut fiber+2 g B. eurycoma

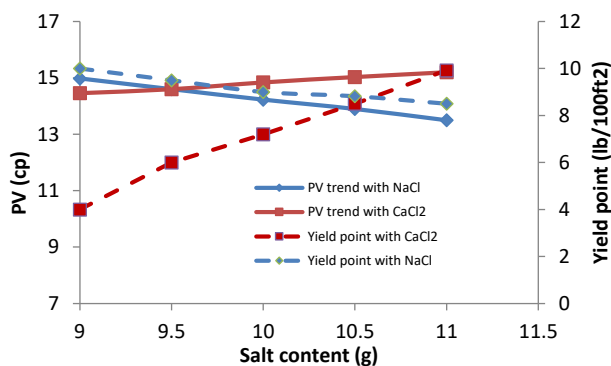


Figure 2. The trend of PV and Yield point of D. maccarpum mud in the presence of Sodium and Calcium Chlorides.

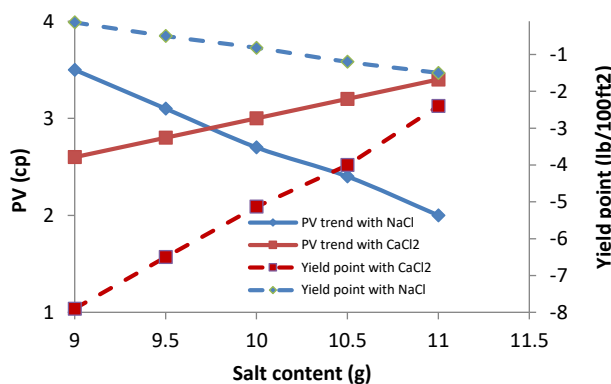


Figure 3. The trend of PV and Yield point of C. populnea mud in the presence of Sodium and Calcium Chlorides.

3. Results and Discussions

3.1 Influence of salts on polymer performance

The presence of salts in solution influences the viscosity of the two polymers. Fig. 2 and 3 shows the viscosity and yield point trends when Sodium and Calcium chlorides were added to the mud containing 5 g D. maccarpum and C. populnea respectively. It was observed that sodium ion has a degrading effect on biopolymer rheology. For example, when the amount of sodium chloride increased from 9 to 11 g, the viscosity and yield point of the mud dropped gently from 15 to 13.5 cP and 10 to 8.5 lb/100ft², respectively. This effect may be attributed to the reduction in molecular dimensions resulting from diminished intermolecular electrostatic forces [35]. Also in the presence of salts, polymer will shrink and coil. The shrinkage of polymer chains can lead to a reduction in viscosity [36]. However, in the presence of a divalent salt (CaCl₂), viscosity and yield point of both polymers increases (see Fig. 2 and 3). This effect is probably due to increased interaction between the polymer molecules [35, 37]. The viscosity increase observed with Ca²⁺ is likely caused by hydrogen bonds that are able to form because of the screening of electrostatic repulsions between charged groups [38]. The salt molecules screen repulsive interactions between polymer chains thus bringing them closer to one another. The closer contact allows the formation of hydrogen bonds between polymer chains. The bonds increased the difficulty of the chains to

move past one another in solution, which is evidenced as an increase in viscosity.

3.2 Rheology

As shown in Table 5 and 6, the rheological parameters of different muds vary as a function of the added amount of *D. micocarpum* and *C. populnea*. It is apparent that high value of the main rheological parameters (yield point Y_p and plastic viscosity V_p) of mud was recorded in experimental runs 1, 2, 8 and 9. Indeed, The Y_p reached the maximum value (25 lb/100ft²) at first run when maximum amount of *D. micocarpum* and *C. populnea* were used. However, the lowest Y_p (1 lb/100ft²) was obtained when the amount of *D. micocarpum* was reduced by 50% (see Run 8). This indicates that the amount of *D. micocarpum* in the formulation must be above the mean value to reach a high yield of the mud. Similarly, highest plastic viscosity (24 cp) was observed with the mean value of *C. populnea* and high value of *D. micocarpum*. But, with minimum amount of *C. populnea* reduction was about 44%. Perhaps, this can be explained by the fact that *C. populnea* acted as a thermal stabilizer of PV at such high temperature of 185 °F.

3.3 Rheological behavior

Fig. 4 shows the rheological behavior of the selected Runs (1, 2, 8 and 9) suspensions. The correlation coefficient (R^2) was obtained for each curve-fitting and the highest coefficient determines the fluid model that better describes the particular fluid. According to rheograms (Fig. 3), all suspensions show non-Newtonian flow. Runs 1, 2 and 8 are best described by power-law with $R^2 = 0.9985$, 0.9954 and 0.9986 , respectively. However, was described by Bingham plastic model with $R^2 = 0.9971$. This behavior could be attributed to the value of the gel strength with Run 9 having the highest (6 lb/100 ft²) and closest to the yield point then the Bingham Plastic model was adequate for the fluid rheology. Runs 1, 2 and 8 are characterized by relatively lower gel strength compared with their corresponding yield points; hence their behavior was similar to power-law fluids. It is very clear that at low quantities of *C. populnea*, the amount of *C. populnea* was responsible for the Bingham Plastic behaviour of Run 9. Similar behavior was ob-

served with Runs number 6 and 7 (Bingham Plastic, $R^2 = 0.9791$ and 0.9921).

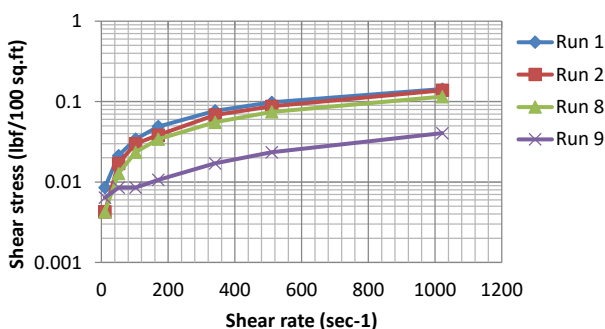


Figure 4. Consistency Plot of Base fluid + Run 1, 2, 8 and 9 *D. micocarpum* and *C. populnea* composition with linear and power correlations.

3.4 Interaction effects of the polymers

To study the factor effects, main or interaction (*D. micocarpum* and *C. populnea*) in the proposed mud formulation, a response surface methodology involving analysis of variance (ANOVA) was performed at 85 and 185 °F and model equations that best described the experiment were developed for optimization study.

3.4.1 Diagnostic checking of the fitted models

All main effects, linear, quadratic and interaction were calculated for each model. The summary statistics obtained from the analysis of variance at 95 percent confidence interval ($\alpha = 0.05$) are shown in Table 7, as well as the correlation coefficient obtained for PV, Y_p , AFL and Gel model. The correlation coefficients for the responses ($R^2 = 0.941$, 0.966 , 0.988 and 0.982 , respectively) were quite high for response surfaces and indicated that the fitted quadratic models accounted for more than 90% of the variance in the experimental data, which were found to be highly significant. Based on F-statistics, the only regression coefficients not significant at 95% is *C. populnea* for PV and Y_p however highly significant for API filtrate and Gel.

3.4.2 Influence of temperature on plastic viscosity

Fig. 5 shows the evolution of the plastic viscosity of muds as a function of the *D. micocarpum* for a fixed value of *C. populnea*. It is noteworthy that the plastic viscosity of mud increases with increase in the amount of *D. micocarpum* in the mud for fixed values of *C. populnea*. With *C. populnea* fixed at a minimum value of 1.5 g (black its lowest value (see Fig. 6). Thus, compared to the *C. populnea*, *D. micocarpum* is not stable at high temperature to maintain mud viscosity.

colored curve in Fig. 5), the PV slightly increases with *D. micocarpum*. However, with *C. populnea* content increased to its maximum value of 4 g, a remarkable increase in PV was observed (red colored curve in Fig. 5). The dominant of *C. populnea* as a mud viscofier at high temperature (185 °F) became very clear. At low temperature (85 °F), *D. micocarpum* dominated and stabilizes the viscosity even with *C. populnea* fixed at i

Table 7. Summary statistics from ANOVA

Parameter	PV (cp)		Yp (lb/100ft ²)		API Filtrate (ml)		10 min Gel	
	F-value	P>F	F-value	P>F	F-value	P>F	F-value	P>F
Model	36.14	0.0002	64.7	< 0.0001	1819.73	< 0.0001	123.60	< 0.0001
C.pop	2.36	0.1754 ^a	0.006	0.9408 ^a	2890.00	< 0.0001	19.20	0.0047
D.mic	105.28	< 0.0001	207.09	< 0.0001	240.00	< 0.0001	235.20	< 0.0001
C.pop ²	42.54	0.0006	18.37	0.0052	1163.64	< 0.0001	240.00	< 0.0001
D.mic ²	11.81	0.0139	78.40	0.0001	2645.00	< 0.0001	58.80	0.0003
C.pop*D.mic	18.73	0.0049	19.69	0.0044	2160.00	< 0.0001	64.80	0.0002
Multiple. R ²	0.941		0.966		0.998		0.982	

*a = not significant at $\alpha = 0.005$ (95 confidence level)

*P>F values less than 0.05 indicate significant model and model terms

The plastic viscosity (PV), Yield point (Yp), API filtrate loss (AFL) and 10 mins Gel (Gel) at the

test condition are best approximated by equations 4 – 7.

$$PV = 56.03075 - 29.56347 * CP - 15.84901 * DM + 4.47123 * C.Pop^2 + 2.21613 * D.mic^2 + 2.84201 * C.pop * D.mic \quad (4)$$

$$Yp = 77.9065 - 19.74612 * CP - 31.75769 * DM + 1.81918 * C.Pop^2 + 4.15221 * D.mic^2 + 2.54977 * C.pop * D.mic \quad (5)$$

$$FL = 2.35156 + 12.29867 * CP - 5.12889 * DM - 1.664 * C.Pop^2 + 1.02222 * D.mic^2 - 0.64 * C.pop * D.mic \quad (6)$$

$$Gel = 6.155 - 3.1733 * CP - 0.8444 * DM + 0.88 * C.Pop^2 + 0.3889 * D.mic^2 - 0.4 * C.pop * D.mic \quad (7)$$

These equations are applicable within the following range of parameters: *D. micocarpum* (2 – 5 g) and *C. populnea* (1.5 – 4 g).

3.4.3 Effects of polymer on yield point at 185 °F

Fig. 7 shows the evolution of the yield point with increase in the concentration of *C. populnea* for fixed values of *D. micocarpum*. The maximum attainable Yp when *D. micocarpum* was fixed at minimum (2 g) is approximately 12.4 cp. This value decreases as the concentration of *C. populnea* increases from 1.5 to 4.0 g. Thus to main-

tain the yield, a relatively small amount of *C. populnea* is needed. However, an increase in the *D. micocarpum* component in the mud to a fixed value of 5 g, a dramatic raise in yield point (18 lbf/100 ft²) was observed. This value increased as the concentration of *C. populnea* increased from 1.5 g (12 lbf/100 ft²) to 4 g (25 cp).

3.4.4 Effects of polymer on Gel strength at 185 °F

Fig. 8 shows a 3-Dimensional plot of the effect of the *C. populnea* and *D. micocarpum* on the 10 min Gel of WBM at high temperature. The gel strength

of drilling fluid determines the ability of the mud to suspend the cuttings and transporting them to the surface. It is evident that with the increase of the concentration of D. micocarpum (about 5.0 g) in the mud, the gel 10 was at the maximum value (5.8 lb/100ft²) when the amount of C. populnea was at its minimum value (1.5 g). For a higher gel, the concentration of D. micocarpum may be increased while reducing the concentration of C. populnea in the mud.

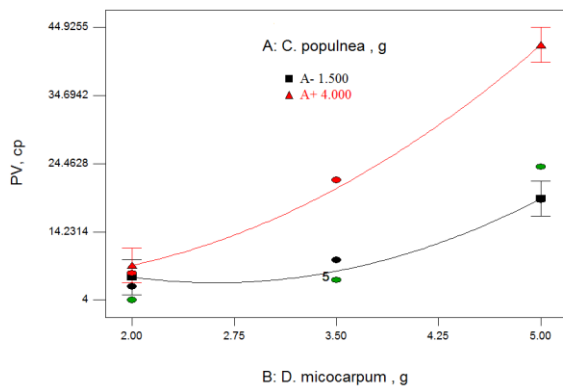


Figure 5. Effect of the D. micocarpum for a fixed value of C. populnea on the Plastic viscosity of WBM at 185 °F

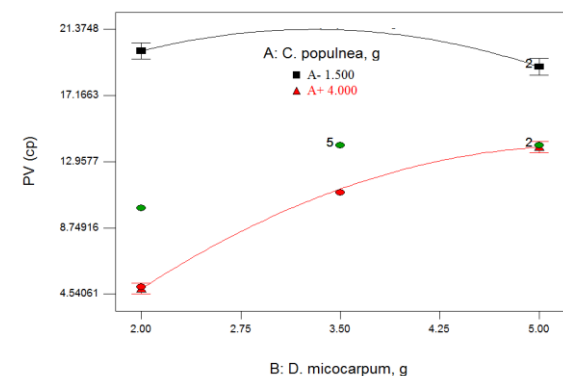


Figure 6. Effect of the D. micocarpum for fixed value of C. populnea on the Plastic viscosity of WBM at 85 °F

3.4.5 The mud API fluid loss

The mud filtrate is the liquid portion of the mud system that is driven through a filter cake into the formation by the difference between the hydrostatic pressure of the mud column and the formation pressure. Fig. 9 shows the relation between mud filtrate and polymer concentration. It was noted that the filtrate increased from 8.9 to

12.2 ml with C. populnea fixed at its lowest value (1.5 g) while D. micocarpum increased from 2 to 5 g. The increment in fluid loss increases as the concentration of C. populnea increases by 50 %. Further increase in the amount of C. populnea above 3 g resulted in a decrease in fluid loss irrespective of the amount of D. micocarpum in the mud. However, a marginal reduction from 13.6 to 12 ml was observed with the amount of C. populnea fixed at 4 g while the amount of D. micocarpum varied between 2 and 5 g respectively.

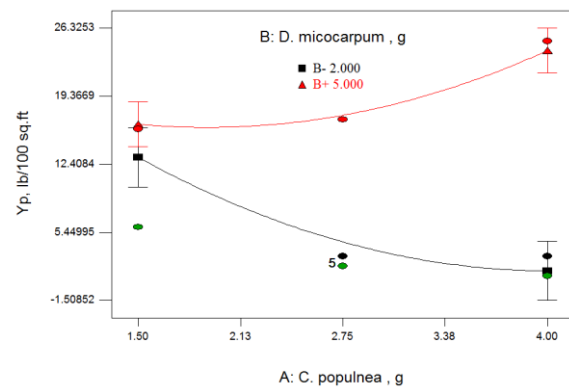


Figure 7. Effect of the C. populnea for a fixed value of D. micocarpum on the Yield point of WBM at 185 °F

4. Optimization Study

4.1 Conditions for optimum responses

The models (PV, Yp, AFL, and Gel) were used to indicate the direction of changing variables for a specific purpose. For example, maximizing the Gel strength and minimizing the API filtrate. The multiple regression equations were solved numerically for the maximum Gel strength (6.0 lb/100ft²) and minimum API filtrate loss (8.2 ml) using desirability (D) objective function (Eq. 8). The overall desirability (D) is the geometric (multiplicative) mean of all individual desirabilities (di) that range from 0 (least) to 1 (most).

$$D = \left(\prod_{i=1}^n d_i \right)^{\frac{1}{n}} \tag{8}$$

Where n is the number of responses. The input variables (C. populnea and D. micocarpum) as shown in Fig. 10 were adjusted within a desired range that keeps the solution within the experimental boundaries. The PV and Yp were also set

to be in range but with their lowest limit set to 10, guided by the API standard [34].

The optimum polymer concentrations predicted for all the response are 1.5 g of *C. populnea* and 4.79 g of *D. micocarpum* in the mud. These values are within the experimental range, indicating the validity of the selection of the variables range. The optimum conditions were experimentally tested, a PV of 18.4 (± 0.63) cp, Yp of 15.7 (± 0.9) lbf/100ft², AFL of 12.1 (± 0.37) ml and 10 min Gel value of 5.6 (± 0.05) lb/100 ft² were obtained. These experimental values at the optimum compositions were in good agreement with the predicted values.

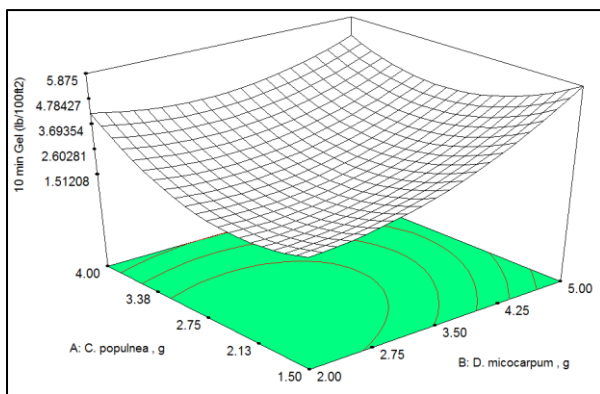


Figure 8. Effect of the *C. populnea* for a fixed value of *D. micocarpum* on the 10 min. Gel of WBM at 185 °F

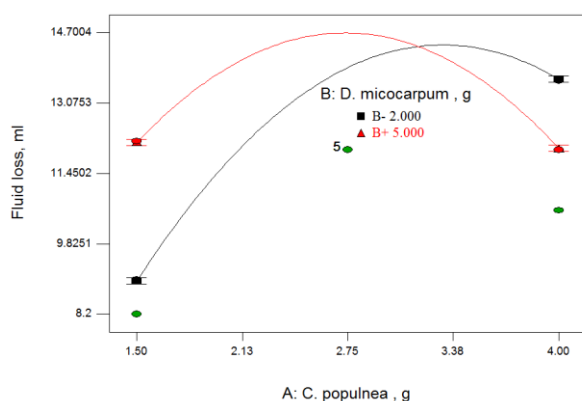


Figure 9. Effect of the *C. populnea* for a fixed value of *D. micocarpum* on the API filtrate of WBM at 185 °F

5. Conclusions

The major objective of this study was to evaluate and optimize two selected biopolymers on the viscosity of drilling muds without compromising

physicochemical properties, Gel strength and API filtrate losses at high temperature. From the obtained results, it can be concluded that:

1. The presence and nature of salts in solution influences differently on the viscosity of the two evaluated biopolymer.
2. The physicochemical and rheological properties of base mud significantly improved in the presence of *C. populnea* and *D. micocarpum* biopolymers.
3. At high temperature, *C. populnea* was found to be thermally stable and a good rheology stabilizer and filtrate reducer at 185 °F.
4. Approximately, 85 % increase in Gel strength was achieved using *C. populnea* and *D. micocarpum* biopolymers.

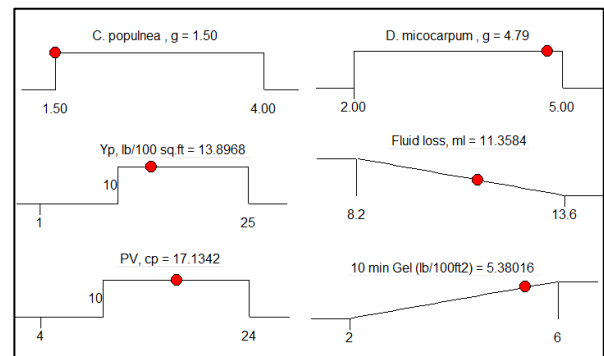


Figure 10. Ramps Report on numerical optimization of *C. populnea* and *D. micocarpum* for optimum PV, Yp, AFL and Gel strength

References

- [1] Bloys. B., Davis. N., Smolen. B., Bailey. L., Reid. P., Fraser. L. and Hodder. M. (1994): "Designing and Managing Drilling Fluids." *Oilfield Review*, Vol. 6, No. 2, pp. 33-43.
- [2] Annis, M.R. and Smith, M.V., (1974). *Drilling Fluid Technology*. Exxon Company, USA
- [3] Mahto, V. and Sharma, V.P. (2004). "Rheological study of a water based oil well drilling fluid." *Journal of petroleum and Science Engineering*, Vol. 45, No. 1, pp. 123-128.
- [4] Teleman, A., Nordström, M., Tenkanen, M., Jacobs, A. and Dahlman, O. (2003). "Isolation and characterization of O-acetylated glucomannans

from aspen and birch wood." *Carbohydrate Research*, Vol. 338, No. 6, pp. 525-534.

[5] Lacroix, M. and Le Tien, C. (2005). "Edible Films and Coatings from non-starch Polysaccharides." *Innovations in food packaging*, pp. 338-361.

[6] Navarrete, R. C., Himes, R. E. and Seheult, J. M. (2000). "Applications of Xanthan Gum in Fluid-Loss Control and Related Formation Damage." *SPE Permian Basin Oil and Gas Recovery Conference*, Midland, TX, March 23-26, 2000; Society of Petroleum Engineers: Richardson, TX, 2000; SPE Paper No. 59535.

[7] Warren, B., van der Horst, P. and Stewart, W. (2003). "Application of amphoteric cellulose ethers in drilling fluids." In *International Symposium on Oilfield Chemistry*. Society of Petroleum Engineers.

[8] Iscan, A. G. and Kok, M. V. (2007). "Effects of polymers and CMC concentration on rheological and fluid loss parameters of water-based drilling fluids." *Energy Sources, Part A*, Vol. 29, No. 10, pp. 939-949.

[9] Dias, F. T. G., Souza, R. R. and Lucas, E. F. (2015). "Influence of modified starches composition on their performance as fluid loss additives in invert-emulsion drilling fluids." *Fuel*, Vol. 140, pp. 711-716.

[10] Li, M. C., Wu, Q., Song, K., Lee, S., Jin, C., Ren, S. and Lei, T. (2015). "Soy protein isolate as fluid loss additive in bentonite-water-based drilling fluids." *ACS applied materials & interfaces*, Vol. 7, No. 44, pp. 24799-24809.

[11] Wang, S., Gao, W., Chen, H. and Xiao, P. (2006). "Studies on the morphological, thermal and crystalline properties of starches separated from medicinal plants." *Journal of food engineering*, Vol. 76, No.3, pp. 420-426.

[12] Singh, J., Kaur, L. and McCarthy, O. J. (2007). "Factors influencing the physico-chemical, morphological, thermal and rheological properties of some chemically modified starches for food applications—A review." *Food hydrocolloids*, Vol. 21, No. 1, pp. 1-22.

[13] Omotioma M.1, Ejikeme P. C. N. and Ume J. I. (2015). "Improving the Rheological Properties of Water Based Mud with the Addition of Cassava

Starch." *IOSR Journal of Applied Chemistry (IOSR-JAC)*, Vol. 8, No. 8, Ver. I, pp. 70-73.

[14] Darley, H. C. H. and Gray, G. R. (1988). *Composition and properties of drilling and completion fluids*, 5th ed. Gulf Professional Publishing, Houston.

[15] Biovis, (2003). *Oilfield Polymers—Construction chemicals—Degussa Edition August*.

[16] Dolz, M., Jimenez, J., Hernandez, M.J., Delegido, J. and Casanovas, A. (2007) "Flow and thixotropy of non-contaminating oil drilling fluids formulated with bentonite and sodium carboxymethyl cellulose." *Journal of Petroleum Science and Engineering*, Vol. 57, No. 3, pp. 294-302.

[17] Olatunde, A. O., Usman, M. A., Olafadehan, O. A., Adeosun, T. A. and Ufot, O. E. (2012). "Improvement of rheological properties of drilling fluid using locally based materials." *Petroleum & Coal*, Vol. 54, No. 1.

[18] Rakitsky, W. and Richey, D. (1992). Rapidly hydrating Welan gum. United States Patent 5175277.

[19] Chen, F. (2007). "Study of factors affecting property of Welan gum solution." *Food Science*. Vol. 28, No. 9, pp. 49-52.

[20] Gao, C. (2015). "Potential of Welan gum as fluid thickener." *Journal of Petroleum Exploration and Production Technology*, Vol. 5, No. 1, pp.109-112.

[21] Kevin, I. and Bala, Z. (2014). "Evaluation of rheological properties of Detarium micocarpum, Brachystegea eurycoma using Herschel-Buckley model and their commercial availability." *Journal of Petroleum and Gas Engineering*, Vol. 5, No. 2, pp. 24-31.

[22] Salawudeen, T.O., Arinkoola, A.O., Jimoh, M.O., Salam, K.K. and Ogunmola, E.O. (2016). "Effect of inert fibre on performance of B. eurycoma as rheology and filtration control additive in water-based drilling fluid." *International Journal of Petroleum Engineering*. Vol. 2, No. 3, pp.191-208.

[23] Suhascaryo, N, Nawangsidi, D. and Handayani, S. R., (2005). "Laboratory Study of High Temperature Additive to Rheology Properties of Drilling Mud Under Dynamic Conditions." *Proceedings of World Geothermal Congress*, pp 3-6.

- [24] Alakali, J. S., Irtwange, S. V. and Mkavga, M. (2009), "Rheological characteristics of food gum (Cissus populnea)." *African Journal of Food Science*, Vol. 3, No. 9, pp. 237-242.
- [25] Owuno, F., Eke-Ejiofor, J. and Owuno, G (2012). "Effects of cissus (Cissus populnea) gum on dough rheology and quality of wheat- cassava composite bread." *Journal of food, agriculture & environment*, Vol. 10, No. 2, pp. 80-84.
- [26] Eichie, F. E. and Amalime, A. E. (2007). "Evaluation of the binder effects of the gum mucilages of Cissus populnea and Acassia senegal on the mechanical properties of paracetamol tablets." *African Journal of Biotechnology*, Vol. 6, No. 9, pp. 2208 -2211.
- [27] Ojekale, A. B., Ojiako, O. A., Saibu, G. M., Lala, A. and Olodude, O. A. (2007). "Long term effects of aqueous stem bark extract of Cissus populnea (Guill. and Per.) on some biochemical parameters in normal rabbits." *African Journal of Biotechnology*, Vol. 6, No. 3, pp. 247-251.
- [28] Leung W, Busson F, Jardin C (1968). Food consumption table use in Africa. FAO, Rome. Italy 306.
- [29] Kouyate, A. M. (2005). Aspects ethnobotaniques et étude de la variabilité morphologique, biochimique et phénologique de Detarium microcarpum Guill. Et Perr. au Mali. Ghent University.
- [30] Onweluzo J, Obanu Z, Onuoha K (1994). "Functional properties of some lesser known tropical legumes." *Journal of Food Science and Technology*, Vol. 31, pp. 302-306.
- [31] Bamisaye, F.A., Ajani, E.O., Nurain, I.O., Adebisi, K.E., Quadri, R.T and Minari, J.B (2014). "Evaluation of Growth Performance of Rats Fed with Sweet Detar, Detarium Microcarpum Fruit as Supplementary Feed Ingredient." *Journal of Environmental Science, Toxicology and Food Technology*, Vol. 8, No. 11, pp. 115-121.
- [32] Bailey, S.W. (1980). In: Brindley, G.W., Brown, G. (Eds.), "Crystal Structures of Clay Minerals and their XRay Identification: Structures of Layer Silicates." *Mineralogical Society*, London, pp. 1-39.
- [33] Akinwande, B.A., Salawudeen, T.O., Arinkoola, A.O. and Jimoh, M.O. (2014) "A suitability assessment of alkaline activated clay for application in vegetable oil refining." *International Journal of Engineering and Advanced Technology Studies*, Vol. 2, No. 1, pp.1-12.
- [34] Amosa M.K, Mohammed I.A, Yaro S.A, Arinkoola A.O and Azeez G.O (2010). "Comparative analysis of the efficacies of ferrous gluconate and synthetic magnetite as sulphide scavengers in oil and gas drilling operation." *NAFTA*, Vol. 61, No. 3, pp. 117-122.
- [35] Smith, I. H. and Pace, G. W. (1982). "Recovery of microbial polysaccharides." *Journal of Chemical Technology and Biotechnology*, Vol. 32, No. 1, pp. 119-129.
- [36] Sheng, J., (2010). *Modern Chemical Enhanced Oil Recovery: Theory and Practice*. Gulf Professional Publishing, Oxford.
- [37] Milas, M., Rinaudo, M., and Tinland, B. (1985). "The viscosity dependence on concentration, molecular weight and shear rate of xanthan solutions." *Polymer Bulletin*, Vol. 14, No. 2, pp. 157-164.
- [38] Wyatt, N. B., Gunther, C. M., & Liberatore, M. W. (2011). "Increasing viscosity in entangled polyelectrolyte solutions by the addition of salt." *Polymer*, Vol. 52, No. 11, pp. 2437-2444.